



Roland DG Texart XT-640

This document bridges the gap between the Fiery XF documentation and the Roland DG Texart XT-640 documentation.

Refer to the Installation section before you connect the printer to a computer. The Operation section has information on profile generation and everyday use. Please refer also to the documentation shipped with your printer, which you can also download from [here](#).

General settings

The printer driver supports the printers: Roland DG Texart XT-640.

Environment requirements are as follows: The driver is available for Windows only. This printer connects via network port to the Fiery XF server.

Products based on Fiery XF technology: Fiery XF 6.5, Fiery XF 7

Fiery XF Model	Description
Roland Texart XT-640 CMYK	4 colors (CMYK)
Roland Texart XT-640 OVcm	8 colors (CMYKcmOV)
Roland Texart XT-640 OVfyfp	8 colors (CMYKOVfyfp)

Operation

Color Tools settings

- Dot size
The dot size cannot be selected. The printer driver decides which dot size (Variable, Fixed, etc.) to use.
- Ink type
This printer supports only Sublimation3 ink.
- Layered printing and split head control
For more information, see separate printer supplement.

- Media types

The following media types are provided by default for the CMYK/CMYKcmOV/CMYKOVfyfp color modes:

- Decoration (Banner)
- Decoration (Banner Satin)
- Decoration (Display Toromat)
- Decoration (Flag Ink Through)


- Resolution

The following resolutions are supported:

- 540 x 360 dpi
- 360 x 720 dpi
- 720 x 720 dpi
- 720 x 1080 dpi

- Print mode

The print mode for Roland DG drivers is displayed as shown in the example below.

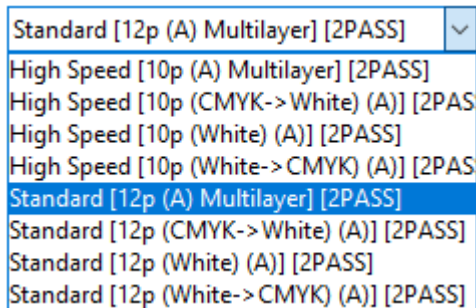

The first name “Standard” is print quality, which represents the overall print speed.

The section inside the first set of parentheses “[12p (A) Multilayer]” represents the quality and layering capability of a print mode. The higher the number associated with “p”, the higher the quality for that print speed.

“(A)”, “(B)” represent the dot sizes. “(A)” means larger dot sizes, “(B)” means smaller dot sizes.

“Multilayer” means this print mode is capable of printing multiple layers of ink depending on settings chosen on the Special Settings tab.

“CMYK->White” means this print mode will print white on top of CMYK, in the same pass and using split head printing. The same applies for other print modes.

The section inside second brackets [2 PASS] represents the total number of passes per line that will be used to print using the selected print mode.